(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(43) International Publication Date 8 January 2004 (08.01.2004)

PCT

(10) International Publication Number WO 2004/004317 A1

(51) International Patent Classification7:

H04N 5/10

(21) International Application Number:

PCT/IB2003/002887

(22) International Filing Date:

23 June 2003 (23.06.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

0208132

28 June 2002 (28.06.2002)

(71) Applicant (for all designated States except US): KONIN-KLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventors; and


(75) Inventors/Applicants (for US only): BELIN, Philippe

[FR/FR]; Société Civile S.P.I.D., 156 Boulevard Haussmann, F-75008 Paris (FR). GUILLERM, Nicolas [FR/FR]; Société Civile S.P.I.D., 156 boulevard Haussmann, F-75008 PARIS (FR).

- (74) Agent: CHAFFRAIX, Jean; Société Civile SPID. 156 Boulevard Haussmann, F-75008 Paris (FR).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD. SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

[Continued on next page]

(54) Title! METHOD AND CIRCUIT FOR EXTRACTING SYNCHRONIZATION SIGNALS IN A VIDEO SIGNAL.

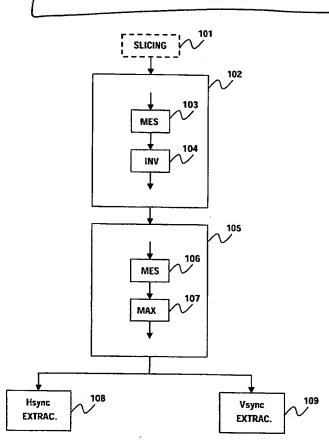

(57) Abstract: The invention relates a method of extracting synchronization signals from an input video signal (Csync) comprising horizontal synchronization pulses at the start of video lines, for generating a horizontal synchronization signal (Hsync), said method comprising: - a calculation step (105) for calculating the duration (D) of the video lines in said input video signal (Csync), - a forcing step (108) for forcing said input video signal (Csync) to an output level, said output level corresponding to the level of said input video signal (Csync) after the horizontal synchronization pulses, said input signal (Csync) being forced between the end of each horizontal synchronization pulse and a moment defined by a first percentage (X1) of said line duration (D), for generating said horizontal synchronization signal (Hsync).Use: Extraction of synchronization signals.